



# P-DUKE POWER

## LCD10 Series

DC-DC Converter  
Up to 10 Watts

**3**  
YEARS  
WARRANTY

ROHS  
COMPLIANT

REACH  
COMPLIANT



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Medical



PV



Railway



**1600**  
VDC  
Isolation  
Voltage

**2 : 1**  
Input  
Range

**6**  
sided  
Shielding

Internal  
EN55032  
Class  
Filter **B**

**LOW**  
Standby  
Power

**NO**  
Min. Load  
Required

**REMOTE**  
**ON**  
**OFF**

**OCP**

**OVP**

**SCP**

**UVP**

### PART NUMBER STRUCTURE

LCD10 -	48	S	05	-	A	HC
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)		Remote ON/OFF & Trim Options	Assembly Options
	12:9~18 24:18~36 48:36~75	S:Single	3P3:3.3 05:5 12:12 15:15 24:24		<input type="checkbox"/> :Negative logic <b>A</b> :Positive logic <b>B</b> :Without Ctrl pin <b>C</b> :Negative logic without Trim pin <b>D</b> :Without Ctrl & Trim pin <b>E</b> :Positive logic without Trim pin	<input type="checkbox"/> : None <b>HC</b> : Heat-sink with Clamp
		D:Dual	05:±5 12:±12 15:±15			

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	µF
LCD10-12S3P3	9 ~ 18	3.3	3000	10	83	3500
LCD10-12S05	9 ~ 18	5	2000	10	86	2500
LCD10-12S12	9 ~ 18	12	830	10	89	430
LCD10-12S15	9 ~ 18	15	670	10	90	350
LCD10-12S24	9 ~ 18	24	416	10	91	125
LCD10-12D05	9 ~ 18	±5	±1000	10	86	±1440
LCD10-12D12	9 ~ 18	±12	±416	10	89	±250
LCD10-12D15	9 ~ 18	±15	±333	10	90	±180
LCD10-24S3P3	18 ~ 36	3.3	3000	6	85	3500
LCD10-24S05	18 ~ 36	5	2000	6	86	2500
LCD10-24S12	18 ~ 36	12	830	6	91	430
LCD10-24S15	18 ~ 36	15	670	6	90	350
LCD10-24S24	18 ~ 36	24	416	6	91	125
LCD10-24D05	18 ~ 36	±5	±1000	6	86	±1440
LCD10-24D12	18 ~ 36	±12	±416	6	90	±250
LCD10-24D15	18 ~ 36	±15	±333	6	90	±180
LCD10-48S3P3	36 ~ 75	3.3	3000	4	85	3500
LCD10-48S05	36 ~ 75	5	2000	4	87	2500
LCD10-48S12	36 ~ 75	12	830	4	90	430
LCD10-48S15	36 ~ 75	15	670	4	90	350
LCD10-48S24	36 ~ 75	24	416	4	91	125
LCD10-48D05	36 ~ 75	±5	±1000	4	87	±1440
LCD10-48D12	36 ~ 75	±12	±416	4	91	±250
LCD10-48D15	36 ~ 75	±15	±333	4	90	±180

**INPUT SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	12Vin(nom)	9	12	18	VDC
	24Vin(nom)	18	24	36	
	48Vin(nom)	36	48	75	
Start up voltage	12Vin(nom)			9	VDC
	24Vin(nom)			18	
	48Vin(nom)			36	
Shutdown voltage	12Vin(nom)	7.5	8	8.8	VDC
	24Vin(nom)	15.5	16	17.5	
	48Vin(nom)	32.5	33	35.5	
Start up time	Constant resistive load	Power up		30	ms
		Remote ON/OFF		30	
Input surge voltage	1 second, max.	12Vin(nom)		25	VDC
		24Vin(nom)		50	
		48Vin(nom)		100	
Remote ON/OFF	Referred to -Vin pin	Positive logic	DC-DC ON	Open or 3 ~ 15VDC	
		(Option)	DC-DC OFF	Short or 0 ~ 1.2VDC	
		Negative logic	DC-DC ON	Short or 0 ~ 1.2VDC	
		(Standard)	DC-DC OFF	Open or 3 ~ 15VDC	
		Input current of Ctrl pin		-0.5	
	Remote off input current		2.5		mA

OUTPUT SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Output power	Output voltage trimmed up 10%				11	W
	Output voltage trimmed up 20%				12	
Voltage accuracy			-1.0		+1.0	%
Line regulation	Low Line to High Line at Full Load	Single	-0.2		+0.2	%
		Dual	-0.5		+0.5	
Load regulation	No Load to Full Load	Single	-0.2		+0.2	%
		Dual	-1.0		+1.0	
	10% Load to 90%Load	Single	-0.1		+0.1	
		Dual	-0.8		+0.8	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0		+5.0	%
Voltage adjustability	Single output	3.3Vout, 12Vout	-10		+10	%
		Others	-10		+20	
Ripple and noise	Measured by 20MHz bandwidth With a 10µF/25V X7R 1206 MLCC	3.3Vout, 5Vout		40		mVp-p
		12Vout, 15Vout		60		
	With a 1µF/50V X7R 1206 MLCC	24Vout		60		
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		µs
Over voltage protection		3.3Vout	3.7		5.4	VDC
		5Vout	6.3		7.4	
		12Vout	13.5		19.6	
		15Vout	18.3		22.0	
		24Vout	29.1		32.5	
Over load protection	% of Iout rated; Hiccup mode			150		%
Short circuit protection			Continuous, automatic recovery			


GENERAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	1600			VDC
		Input(Output) to Case	1000			
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					1500	pF
Switching frequency			297	330	363	kHz
Safety approvals	IEC /EN /UL 62368-1				UL:E193009 CB:UL(Demko)	
Case material					Copper	
Base material					FR4 PCB	
Potting material					Epoxy (UL94 V-0)	
Weight					16.5g (0.58oz)	
MTBF	MIL-HDBK-217F, Full load				3.308 x 10 <sup>6</sup> hrs	

ENVIRONMENTAL SPECIFICATIONS						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating ambient temperature		Without derating	-40		+78	°C
		With derating	+78		+105	
Maximum case temperature					105	°C
Storage temperature range			-55		+125	°C
Thermal impedance		Without heat-sink		16.18		°C/W
		With heat-sink		15.13		
Thermal shock						MIL-STD-810F
Vibration						MIL-STD-810F
Relative humidity						5% to 95% RH


EMC SPECIFICATIONS			
Parameter	Conditions		Level
EMI	EN55032	Without external components	Class A
		With external components	Class B
EMS	EN55035		
ESD	EN61000-4-2	Air $\pm 8\text{kV}$ and Contact $\pm 6\text{kV}$	Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	$\pm 2\text{kV}$	Perf. Criteria A
		With an external input filter capacitor (Nippon chemi-con KY series, $220\mu\text{F}/100\text{V}$ .)	
Surge	EN61000-4-5	$\pm 1\text{kV}$	Perf. Criteria A
		With an external input filter capacitor (Nippon chemi-con KY series, $220\mu\text{F}/100\text{V}$ .)	
Conducted immunity	EN61000-4-6	3 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.


## CHARACTERISTIC CURVE

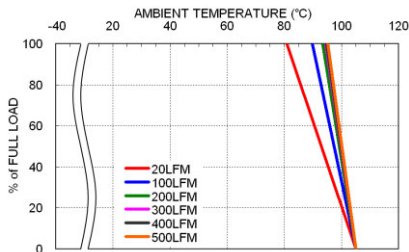


LCD10-48S05 Derating Curve

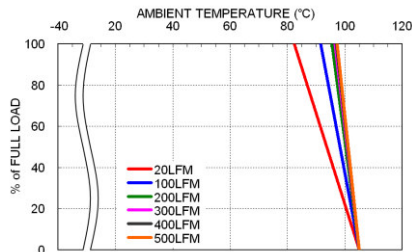

LCD10-48S05 Derating Curve With Heat-sink

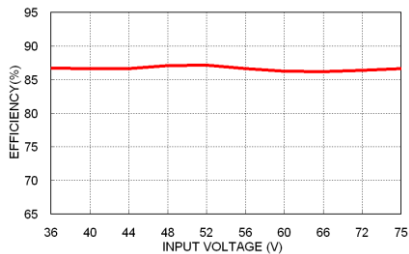

LCD10-48S05 Efficiency vs. Input Voltage

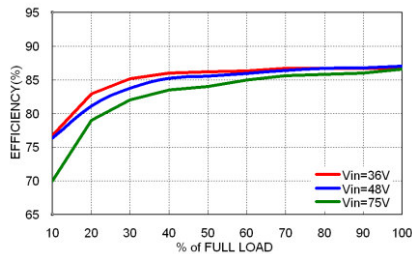

LCD10-48S05 Efficiency vs. Output Load

## FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
LCD10-12S□□、LCD10-12D□□	2	Slow-Blow
LCD10-24S□□、LCD10-24D□□	1.25	Slow-Blow
LCD10-48S□□、LCD10-48D□□	0.63	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

## MECHANICAL DRAWING

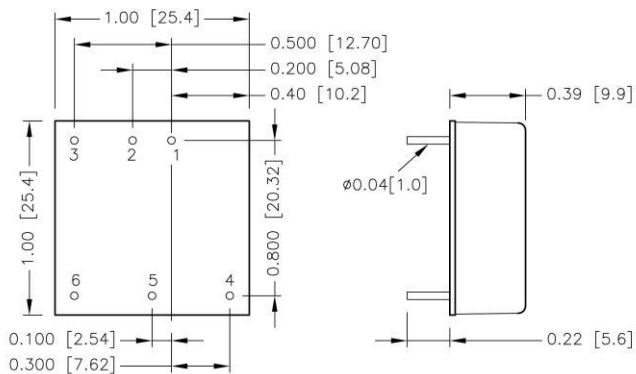

BOTTOM VIEW


## PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	+Vout	+Vout
5	Trim	Common
6	-Vout	-Vout

1. All dimensions in inch [mm]
2. Tolerance :x.xx±0.02 [x.x±0.5]  
x.xxx±0.01 [x.xx±0.25]
3. Pin pitch tolerance ±0.01 [0.25]
4. Pin dimension tolerance ±0.004[0.10]

## HEAT-SINK OPTIONS


-HC (Heat-sink with clamps)

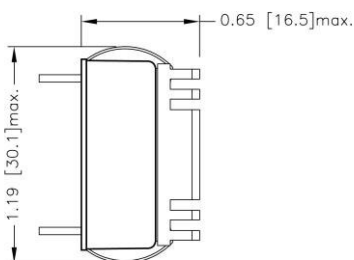


\* All dimensions in inch [mm]

## RECOMMENDED PAD LAYOUT

### Standard

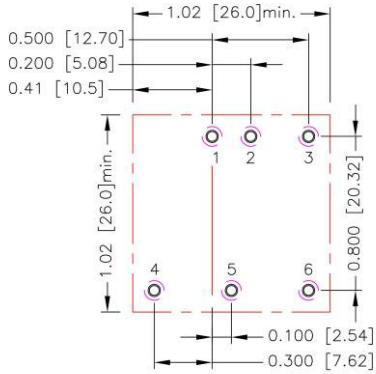

### -HC

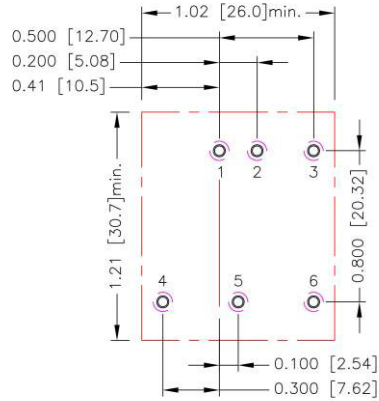

All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1.2.3.4.5.6:  $\Phi 0.051[1.30]$   
 Top view pad 1.2.3.4.5.6:  $\Phi 0.064[1.63]$   
 Bottom view pad 1.2.3.4.5.6:  $\Phi 0.102[2.60]$

## THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit.

Heat is removed by conduction, convection, and radiation to the surrounding environment.


Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".

When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature".

You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).

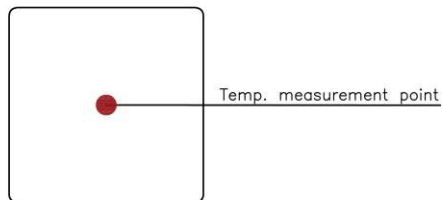

TOP VIEW

## OUTPUT VOLTAGE ADJUSTMENT

Output voltage set point adjustment allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the Trim pin and either the +Output or -Output pins. With an external resistor between the Trim and -Output pin, the output voltage set point increases. With an external resistor between the Trim and +Output pin, the output voltage set point decreases. The external Trim resistor needs to be at least 1/16W of rated power.

### Trim Up Equation

$$R_U = \left[ \frac{G \times L}{(V_{o,up} - L - K)} - H \right] \Omega$$

### Trim Down Equation

$$R_D = \left[ \frac{(V_{o,down} - L) \times G}{(V_o - V_{o,down})} - H \right] \Omega$$


### Trim constants

Module	G	H	K	L
LCD10-□□S3P3	5110	2050	0.8	2.5
LCD10-□□S05	5110	2050	2.5	2.5
LCD10-□□S12	10000	5110	9.5	2.5
LCD10-□□S15	10000	5110	12.5	2.5
LCD10-□□S24	56000	13000	21.5	2.5

### EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



#### □□S3P3

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (kΩ)	385.071	191.511	126.990	94.730	75.374	62.470	53.253	46.340	40.963	36.662

#### □□S05

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.050	5.100	5.150	5.200	5.250	5.300	5.350	5.400	5.450	5.500
RU (kΩ)	253.450	125.700	83.117	61.825	49.050	40.533	34.450	29.888	26.339	23.500

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	5.550	5.600	5.650	5.700	5.750	5.800	5.850	5.900	5.950	6.000
RU (kΩ)	21.177	19.242	17.604	16.200	14.983	13.919	12.979	12.144	11.397	10.725

#### □□S12

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.120	12.240	12.360	12.480	12.600	12.720	12.840	12.960	13.080	13.200
RU (kΩ)	203.223	99.057	64.334	46.973	36.557	29.612	24.652	20.932	18.038	15.723

#### □□S15

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.150	15.300	15.450	15.600	15.750	15.900	16.050	16.200	16.350	16.500
RU (kΩ)	161.557	78.223	50.446	36.557	28.223	22.668	18.700	15.723	13.409	11.557

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	16.650	16.800	16.950	17.100	17.250	17.400	17.550	17.700	17.850	18.000
RU (kΩ)	10.042	8.779	7.711	6.795	6.001	5.307	4.694	4.149	3.662	3.223


#### □□S24

ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	24.240	24.480	24.720	24.960	25.200	25.440	25.680	25.920	26.160	26.400
RU (kΩ)	570.333	278.667	181.444	132.833	103.667	84.222	70.333	59.917	51.815	45.333

ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	26.640	26.880	27.120	27.360	27.600	27.840	28.080	28.320	28.560	28.800
RU (kΩ)	40.030	35.611	31.872	28.667	25.889	23.458	21.314	19.407	17.702	16.167

**OUTPUT VOLTAGE ADJUSTMENT(CONTINUED)**

Trim-down


  S3P3

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD (k $\Omega$ )	116.719	54.779	34.133	23.810	17.616	13.486	10.537	8.325	6.604	5.228

  S05

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.950	4.900	4.850	4.800	4.750	4.700	4.650	4.600	4.550	4.500
RD (k $\Omega$ )	248.340	120.590	78.007	56.715	43.940	35.423	29.340	24.778	21.229	18.390

  S12

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.880	11.760	11.640	11.520	11.400	11.280	11.160	11.040	10.920	10.800
RD (k $\Omega$ )	776.557	380.723	248.779	182.807	143.223	116.834	97.985	83.848	72.853	64.057

  S15

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.850	14.700	14.550	14.400	14.250	14.100	13.950	13.800	13.650	13.500
RD (k $\Omega$ )	818.223	401.557	262.668	193.223	151.557	123.779	103.938	89.057	77.483	68.223

  S24

$\Delta V$ (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	23.760	23.520	23.280	23.040	22.800	22.560	22.320	22.080	21.840	21.600
RD (k $\Omega$ )	4947.667	2439.333	1603.222	1185.167	934.333	767.111	647.667	558.083	488.407	432.667