


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

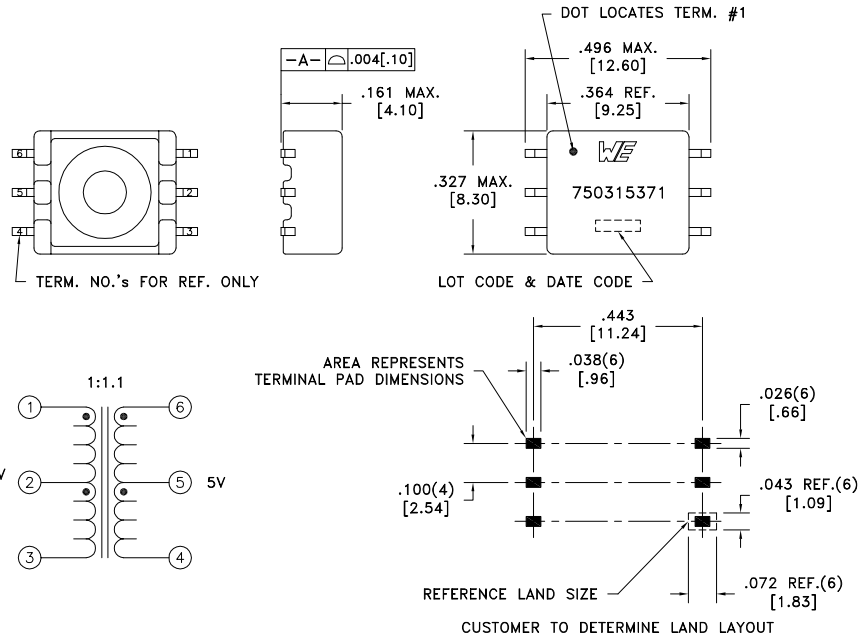

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-3 @20°C	0.080 ohms max.
D.C. RESISTANCE	6-4 @20°C	0.080 ohms max.
INDUCTANCE	1-3 100kHz, 10mVAC, Ls	72uH min.
DIELECTRIC	1-6 3125VAC, 1 second	2500VAC, 1 minute
TURNS RATIO	(6-4):(1-3)	1.1:1, ±2%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

CURRENT RATING: 1A

- 6C VOLTAGE-TIME: 4.3Vus for Unipolar operation
8.6Vus for Bipolar operation

COPLANARITY: All 6 terminals must lie on a plane within .004 [.10] of Surface A after lead tinning.

- 6B Qualified to AEC-Q200.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

DETAILS SUBJECT TO CHANGE

REV.	DATE	Packaging Specifications		Tolerances unless otherwise specified:	DRAWING TITLE	PART NO.
6D	3/19	Method: Tape & Reel		Angles: ±1°	TRANSFORMER	750315371
6C	4/17	PKG-1054		Fractions: ±1/64		
6B	4/16	www.we-online.com/midcom		Decimals: ±.005 [.13]	This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750315371
6A	11/15	SEE REVISION SHEET FOR REVISION LEVEL		Footprint: ±.005 [.13]		

