


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

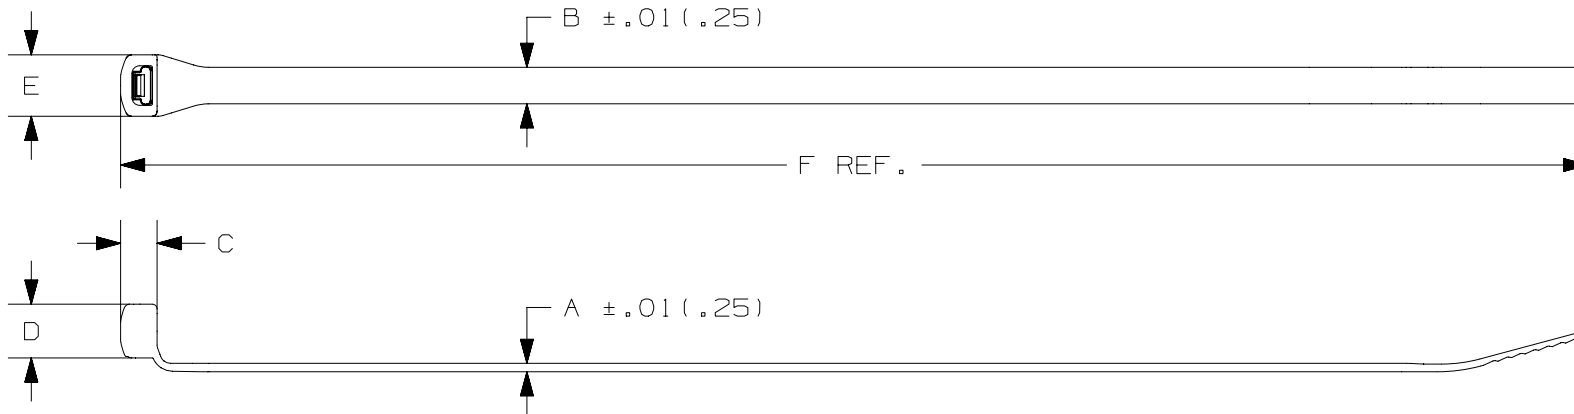

PANDUIT * PART NO.	BUNDLE DIA.		A in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	E in. (mm)	F in. (mm)	MIN. LOOP TENSILE lbs (N)	CROSS- SECTION	WEIGHT lbs/100pcs (g)
	MIN in (mm)	MAX in (mm)									
CBR2S	.160 (4.1)	2.0 (50.8)	.044 (1.1)	.190 (4.8)	.190 (4.8)	.280 (7.1)	.332 (8.4)	7.6 (193)	50 (222)	STANDARD	.24 (107)
CBR3S	.280 (7.1)	3.0 (76.2)	.052 (1.3)	.190 (4.8)	.215 (5.5)	.280 (7.1)	.332 (8.4)	10.8 (274.3)	50 (222)	STANDARD	.39 (174.8)
CBR4S	.280 (7.1)	4.0 (101.6)	.052 (1.3)	.190 (4.8)	.215 (5.5)	.280 (7.1)	.332 (8.4)	14.0 (355.6)	50 (222)	STANDARD	.48 (218.6)
CBR2HS	.160 (4.1)	2.0 (50.8)	.058 (1.4)	.250 (6.4)	.240 (6.1)	.326 (8.2)	.388 (9.9)	8.0 (203.2)	85 (378)	HEAVY/STANDARD	.43 (195)
CBR4LH	.315 (8.0)	4.0 (101.6)	.070 (1.8)	.300 (7.6)	.322 (8.2)	.400 (10.2)	.490 (12.4)	14.6 (370.8)	120 (534)	LIGHT/HEAVY	1.13 (515.8)
CBR6LH	.315 (8.0)	6.0 (152.4)	.070 (1.8)	.300 (7.6)	.322 (8.2)	.400 (10.2)	.490 (12.4)	20.9 (530.9)	120 (534)	LIGHT/HEAVY	1.61 (731.5)

* SEE www.panduit.com FOR CURRENT PART NUMBER SUFFIX DESIGNATION AND FOR PACKAGE SIZE AND PART COLOR

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	DRAWING NUMBER	SIZE
							CBR SERIES CABLE TIE	SS-27295	A
							CUSTOMER DRAWING		
							ITEM REVISION NAME		
							10B0150V/01		
							DATASET FILE NAME		
							10B0150V_DC/01_SS-27295_REV05		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		
							.x ± .01 [.25] .xxx ± .020 [.51]		
							.xx ± .02 [.5] ANGLES ±		
							THIRD ANGLE PROJECTION		
							MATERIAL:		
							NYLON 6.6		
							DRAWING NUMBER:		
							SS-27295		
							DRAWN BY		
							JABO		
							DATE		
							6/22/01		
							CHK		
							TGS		
							SCALE		
							NONE		
							SHT 1 OF 1		

D10100DA/16